


TIRANT RODANTE PLINE

Safety factor from 3 to 5:1

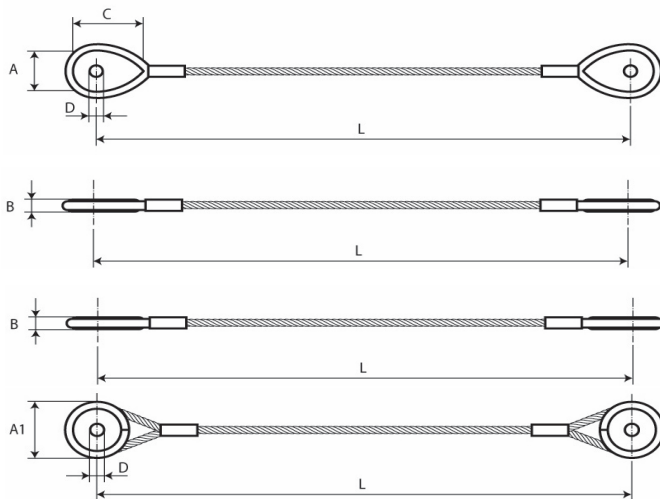

6x36wrc rezistenta		6x36wrc r 2160 rezistenta		AxBxC	D	A1xB1	D
Ø cablu					min/max		min/max
mm	kN	kN	mm	mm	mm	mm	mm
16	172.2	212.4	86x32x11 g	20x40	90x26	16x80	
18	218.5	268.2	86x32x11 g	20x40	90x26	16x80	
20	269.3	331.2	86x32x11 g	20x40	100x33	20x84	
22	324.9	400.5	86x32,5x12 f	22x45	100x33	20x84	
24	386.7	447	105x37x14 u	26x50	120x38	26x78	
26	424.8	509.8	105x37x14 u	26x50	120x38	26x78	
28	482.3	648.9	124x42x16 4	30x56	120x38	26x78	
30	565.2	745.2	124x42x16 4	30x56	130x42	30x74	
32	643.5	847.8	140x48x19 u	32x63	130x42	30x74	
34	726.3	955.8	153x55x21 u	36x70	150x46	36x90	
36	813.6	1071.9	153x55x21 u	36x70	150x46	36x90	
38	906.3	1194.3	171x57x23 b	41x80	170x52	42x104	